



ITEM TECHNICAL CARD

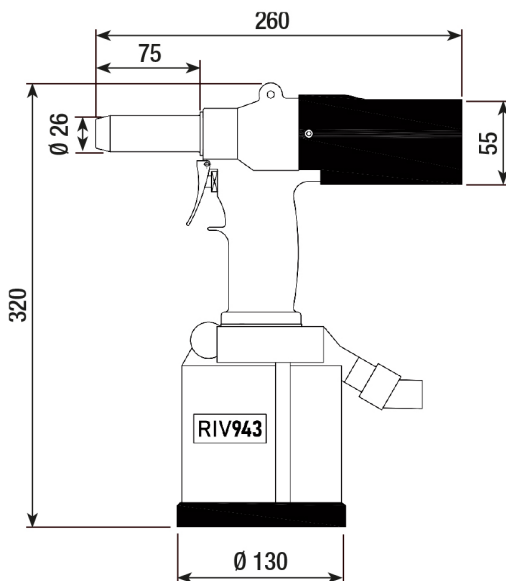

air consumption x cycle 6 bar (lt)	7,5
stroke (mm)	10,0
air working pressure (bar)	6,0
min/max air pressure (bar)	5/7
weight (kg)	3,1
noise level dB(A)	< 90,0
vibrations (m/s ²)	< 2,5
power (N)	32.000
motor speed spin on (rpm)	2200,0
motor speed spin off (rpm)	2600

DESCRIZIONE \ DESCRIPTION: RIV943-Hydrop. tool for inserts in box w/out kit /				CATEGORIA \ CATEGORY:		6568800	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:			
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:		 FASTENERS & TOOLS <small>a FERRI GROUP company</small>	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW			
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128)	REVISIONE: REVISION:	
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	